## (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 23 June 2005 (23.06.2005)

**PCT** 

## (10) International Publication Number WO 2005/057142 A1

(51) International Patent Classification<sup>7</sup>: G01N 33/28 G01F 1/74,

(21) International Application Number:

PCT/NO2004/000379

- (22) International Filing Date: 9 December 2004 (09.12.2004)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20035481


9 December 2003 (09.12.2003) NO

- (71) Applicant (for all designated States except US): MULTI PHASE METERS AS [NO/NO]; Petroleumsveien 8, N-4066 STAVANGER (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): WEE, Arnstein [NO/NO]; Welhavens gate 6A, N-0166 OSLO (NO).

- (74) Agent: OSLO PATENTKONTOR AS; Postboks 7007 M, N-0306 Oslo (NO).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: A METHOD AND FLOW METER FOR DETERMINING THE FLOW RATES OF A MULTIPHASE FLUID

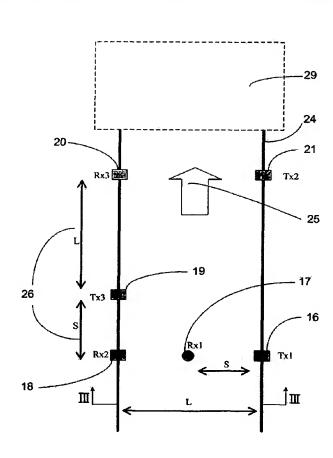

(57) Abstract: A method for determining the flow rates and/or composition of a fluid comprising a multi-component mixture of a gas and at least one liquid in a pipe comprises the following steps: electromagnetic loss and phase measurements are performed in at least two directions of the pipe; the degree of annular flow is determined based on the measurements of step a; the permittivity of the flow mixture is calculated based on the results from steps a and b, including corrections for the degree of annular flow; the mixture density is measured and compensated for the degree of annular flow; the temperature and pressure are obtained; the velocity of liquid and gas are determined, and based on the knowledge of densities and permittivities of the components of the fluid mixture, and the result from the above steps a-f, the volume and mass flow rates of the gas and liquid or liquids of the fluid mixture are calculated. A flow meter for performing the method is also disclosed.

## WO 2005/057142 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.